TAMANG GROUP
PAINTING SEWA
BETTER SPACES FOR A BRIGHTER TOMMORROW


Company Profile

Turning Plain Walls into Better Spaces.





2026





Presented by
Tamang Group Painting Sewa

+977 9841877273 | www.tgps.com.np | Dallu, Kathmandu

TAMANG GROUP
PAINTING SEWA
BETTER SPACES FOR A BRIGHTER TOMMORROW

Who We Are

Tamang Group Painting Sewa is a professional painting company dedicated to transforming homes, apartments, offices, and commercial spaces. We provide quality interior and exterior painting services with attention to every detail. Our experienced team focuses on clean finishes, reliable service, and customer satisfaction. We believe every fresh coat of paint can bring new life, beauty, and character to your space.



With years of experience and a passion for quality painting, we understand that every project is unique and deserves the right approach. From surface preparation to the final coat, our skilled team works carefully to achieve a smooth, neat, and professional finish. We take pride in providing dependable painting solutions that meet the needs of both residential and commercial clients. Whether it is a single room, an entire house, an apartment building, an office, or a large commercial property, we approach every project with the same level of care and dedication..

A Trusted Painting Partner

We provide quality interior and exterior painting services with attention to every detail. Our experienced team focuses on clean finishes, reliable service, and customer satisfaction.

At Tamang Group Painting Sewa, we are committed to creating spaces that look fresh, attractive, and welcoming.





TAMANG GROUP
PAINTING SEWA
BETTER SPACES FOR A BRIGHTER TOMMORROW

What We Do


At Tamang Group Painting Sewa, we provide professional painting and finishing services for homes, apartments, offices, and commercial buildings. Our focus is on quality workmanship, timely service, and complete customer satisfaction.

Our Services

- Building Construction
- Painting
- Interior Design
- False Ceiling
- Lighting
- All furniture work
- Water Proofing



From surface preparation and color selection to interior and exterior painting, our skilled team handles every stage with care and precision. We work with quality materials and proven techniques to deliver clean, smooth, and long-lasting finishes. Whether you are renovating an existing space or giving a new property its first coat of paint, we provide reliable solutions tailored to your needs

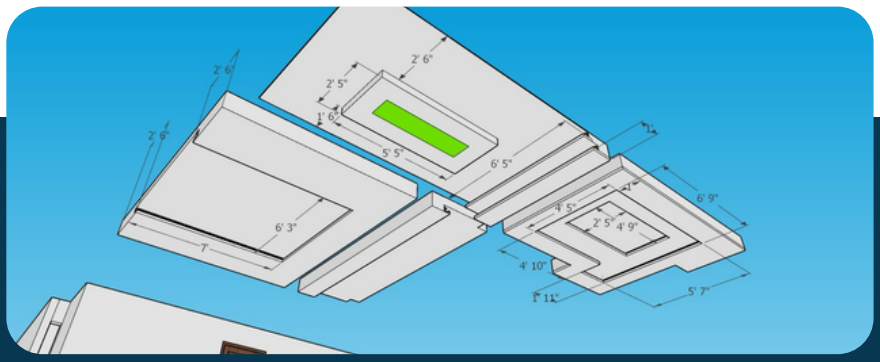

TAMANG GROUP
PAINTING SEWA
BETTER SPACES FOR A BRIGHTER TOMMORROW

Why Choose Us



At Tamang Group Painting Sewa, we believe quality, reliability, and customer satisfaction are the foundation of every successful project. Our experienced team pays attention to every detail, from proper surface preparation to the final finish, ensuring professional results every time.





We focus on results, clear satisfacation and work that match your goals.

Simple, Effective, and Affordable

We use quality materials, follow efficient work practices, and complete projects with care and responsibility. Whether it's a home, apartment, office, or commercial building, we are committed to delivering clean, durable, and beautiful results that our customers can trust.

- Competitive Pricing
- Satisfaction Guaranteed
- Experienced & Skilled Team
- Quality Workmanship

TAMANG GROUP
PAINTING SEWA
BETTER SPACES FOR A BRIGHTER TOMMORROW

Our Process

At Tamang Group Painting Sewa, we follow a simple and organized process to make every project smooth and hassle-free. We begin by discussing your requirements, ideas, and expectations to understand exactly what you need.



Consultation **Site Visit** **Planning**



Preparation **Work Execution** **Final Handover**

Our process begins with a simple consultation to understand your needs and ideas. We then conduct a site visit to assess the space and requirements. After that, we focus on planning every detail of the project before moving into preparation. Once everything is ready, our skilled team begins the work execution, ensuring quality and proper finishing throughout. Finally, we complete a final handover, making sure the project is finished to your satisfaction

TAMANG GROUP
PAINTING SEWA
BETTER SPACES FOR A BRIGHTER TOMMORROW

Method Statement for Wall Putty and Wall Painting

Purpose

To define the combined procedure for wall putty application followed by painting to achieve a high-quality and durable wall finish.

Scope

Applicable to internal plastered masonry and RCC wall surfaces.

Materials

- White cement–based wall putty
- Emulsion paint (approved color and brand)
- Primer
- Clean potable watee

Tools and Equipment

- Putty knife / steel trowel
- Paint rollers and brushes
- Mixing buckets
- Sandpaper (180–400 grit)
- Clean cloth
- Airless sprayer
- Compressor sprayer
- Sander machine (7''inch 9'' inches)

Surface Preparation

- Ensure plaster is cured and surface is clean.
- Remove dust, grease, and loose particles.
- Slightly dampen surface before putty application.

TAMANG GROUP
PAINTING SEWA
BETTER SPACES FOR A BRIGHTER TOMMORROW

Method Statement for Wall Putty and Wall Painting

Application Procedure

Step 1: Wall Putty Application

- Apply first and second coats of wall putty as specified.
- Sand between coats and after final drying.

Step 2: Primer Application

- Apply one uniform coat of primer.
- Allow complete drying.

Step 3: Painting

- Apply first coat of paint and allow drying.
- Apply second coat for uniform finish.

Quality Control

- Smooth and even surface finish.
- Uniform color and texture.
- No cracks, peeling, or visible defects.

Safety Precautions

- Use PPE during puttying, sanding, and painting.
- Maintain proper ventilation.

Inspection and Acceptance

- Final inspection by engineer/consultant.
- Approval required before handover.

info@tgpsewa.com.np
www.tgpsewa.com.np
+977 9841877273

TAMANG GROUP
PAINTING SEWA
BETTER SPACES FOR A BRIGHTER TOMMORROW

Date: 03/10/2026

Vijay Agrawal Jee
Naxal, Nepal

Please find below price quotation for painting.

Dear Sir

	Painting work				
Sn	Description	Unit	Qty	Rate	Amount
5.1	Providing and applying paint on internal surfaces in two or more coats over a primer coat, including surface preparation, sanding, finishing and all required accessories, supports and scaffoldings, complete in accordance with specifications and as directed by the Engineer -in -charge. (Asian Uno distemper)	m2	26280.16	75.00	1,971,012.00
5.2	Providing and applying weatherproof paint (Asian Apex paints) on external including surface preparation, one coat of primer, two finishing coats and all required accessories, supports and scaffoldings, complete in accordance with specifications and as directed by the Engineer -in -charge.	m2	7329.05	170.00	1,245,938.50
5.3	Providing and applying one coat of Asian Paints Apex Base Coat on existing wall surfaces after thoroughly cleaning and removing fire smoke stains, soot, dust, loose particles, grease, and other contaminants to obtain a clean and sound substrate. The work shall include all necessary surface preparation, minor touch-up repairs, labour, tools, equipment, scaffolding, and materials, complete in all respects, as per the manufacturer's specifications, ready to receive the final coats of paint.	m2	12000.00	129.00	1,548,000.00
5.4	Providing and applying two coats of white cement-based wall putty on the prepared ceiling surface to achieve a smooth, even, and durable finish. The work shall include cleaning the surface, filling minor undulations, sanding between coats, and preparing the surface ready for primer and final paint, including all labour, materials, tools, scaffolding, and equipment, complete in all respects, as per the manufacturer's specifications and the Engineer's instructions.	m2	2973.98	119.00	353,903.26
5.5	Supply and applying on metal surface with one coat of primer and two coat of approved quality Enamel paints to give an even and inform hade as specifications and instruction of site incharge.	m2	400.00	193.00	77,200.00
	Total				5,196,053.76

info@tgpsewa.com.np
www.tgpsewa.com.np
+977 9841877273

Note:

Above coverage are theoretical coverage. Actual coverage may vary from the quoted coverage due to factors such as method/condition of application, surface roughness/porosity. We recommend a trial to arrive at practical coverage.

- To arrive at actual total material cost, multiply per sq. ft. cost (based on actual coverage) by your total sq. ft. paintable area.
- The rates are subject to any future product price changes.
- Approximately 5% to 10% wastage is to be considered on the above cost.
- Extra charge will be incurred for colorant.
- **The above rates exclude VAT (13%).**

Sincerely,

Mohan Lal Tamang
Proprietor
Tamang Group Painting Sewa

TAMANG GROUP
PAINTING SEWA
BETTER SPACES FOR A BRIGHTER TOMMORROW

Trusted By Our Clients















At Tamang Group Painting Sewa, every project is built on trust, quality workmanship, and dependable service.From residential spaces to commercial buildings and large-scale projects, our clients trust us to deliver neat finishes, skilled execution, and work that stands the test of time.We are proud to have worked with respected organizations, contractors, developers, and property owners across Nepal. Their trust is the strongest reflection of our work.

TAMANG GROUP
PAINTING SEWA
BETTER SPACES FOR A BRIGHTER TOMMORROW

Our Certificates



Regd. No.: 1237- 050/051

The Kathmandu Housing Company (P.) Ltd.

Ref. No.: 27/०७७/०७८ Date: २०७७-12-16

TO WHOM IT MAY CONCERN

This is to certify that **Tamang Group Painting Sewa**, the Contractor has satisfactorily completed painting works and false ceiling laying works with specified period of time with good quality management, materials, and workmanship and without any accident.

Project Detail:

Project

- The Kathmandu Housing Company Pvt. Ltd. (Civil Homes Phase IX), Godavari, Lalitpur

Scope

- Supplying paints and painting of internal and external wall of building, wooden doors, metal fencing and railing.
- Supply and laying of false ceiling.

Contract Period

Contract agreement date: 2074-11-06 to till date.

16.12.2020

Kathmandu Housing

Er. Bidyapati Chaudhari
Project Coordinator

Corporate Office : Pulchowk, Lalitpur, Tel : 4030627, 4030628, 5524719, Fax : 4030613, Site Office : Kirtini Godavari
E-mail: sales@civilgroup.com.np, website: civilgroup.com.np

TAMANG GROUP
PAINTING SEWA
BETTER SPACES FOR A BRIGHTER TOMMORROW

Our Certificates



CIVIL GROUP PVT. LTD.
Head Office : Civil Complex, Soalteemode, Kathmandu,
Tel : 4030623, 4030624, 4030725, 4030726, 4030627, 4030628
Fax : 4030613, www.civilgroup.com.np
Reg. No.:75882/067/068

Ref. 31/077/078 Date : 2077-12-16

TO WHOM IT MAY CONCERN

This is to certify that **Tamang Group Painting Sewa**, the Contractor has satisfactorily completed painting works and false celling laying works with specified period of time with good quality management, materials, and workmanship and without any accident.

Project Detail:

Project

- Civil Homes Pvt. Ltd. ,Phase IV, Dhapakhel, Lalitpur
- Civil Apartment Pvt. Ltd., Dhapakhel, Lalitpur

Scope

- Supplying paints and painting of internal and external wall of building, wooden doors, metal fencing and railing.
- Supply and laying of false celling.

Contract Period

Contract agreement date: 2074-07-05 to till date.

16.12.20

CIVIL GROUP

Er. Bidyapati Chaudhari
Project Coordinator

Scanned with CamScanner

Promoted by Bankers and Engineers

TAMANG GROUP
PAINTING SEWA
BETTER SPACES FOR A BRIGHTER TOMMORROW

Let's Work Together



Turning Plain Walls into Better Spaces.

+977 9841877273

www.tgpsewa.com.np

Dallu, Kathmandu